


## Domestic fuse carriers

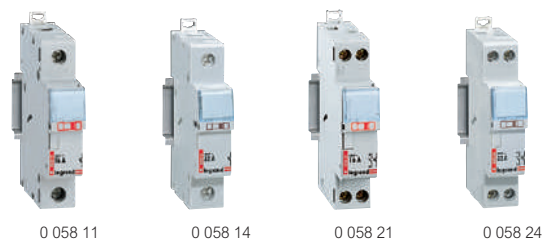

Dimensions **see e-catalogue**

With label-holders  
 With insulated carrier class II, padlockable  
 Coupling via supply busbars  
 Shielded terminals capacity 2 x 10 mm<sup>2</sup>  
 Possibility to signal indicator blown fuse  
 Fuse not supplied

Pack	Cat.Nos	For domestic cylindrical cartridge fuses		
		Conform to EN 60269-1 and IEC 60269-1,3		
		<b>Single pole</b>		
		For domestic cartridges	Cartridge dimensions (mm)	Number of modules
10	0 058 10	10 A - 230 V~	8.5 x 23	1
10	0 058 11	16 A	10.3 x 25.8	1
10	0 058 12	20 A - 400 V~	8.5 x 31.5	1
10	0 058 13	25 A	10.3 x 31.5	1
10	0 058 14	32 A	10.3 x 38	1
		<b>Single pole + neutral</b>		
10	0 058 20	10 A - 230 V~	8.5 x 23	1
10	0 058 21	16 A	10.3 x 25.8	1
10	0 058 22	20 A - 400 V~	8.5 x 31.5	1
10	0 058 23	25 A	10.3 x 31.5	1
10	0 058 24	32 A	10.3 x 38	1

Pack	Cat.Nos	For miniature cylindrical cartridge fuses		
		Conform to EN 60127-6 and IEC 60127-6		
		To protect sensitive equipment: transformers, electronic equipment, etc.		
		<b>Single pole</b>		
		Cartridge dimensions (mm)	Voltage	Number of modules
5	0 058 00	5 x 20	250 V~	1
		<b>Single pole + neutral</b>		
5	0 058 02	5 x 20	250 V~	1

## Domestic cartridge fuses



Pack	Cat.Nos		Miniature type 5 x 20				
			Instant reaction fuse - Ceramic body Conform to EN/IEC 60127-2 High rupture capacity (A) For use with dimmers, Viking terminal blocks and emergency lighting units, transformers				
			Rating (Amps)	Voltage ~ (Volts)	Rupture capacity (Amps)		
10	0 102 02		0.2				
10	0 102 05		0.5				
10	0 102 06		0.63				
10	0 102 10		1				
10	0 102 20		2	250	1500		
10	0 102 30		3.15				
10	0 102 50		5				
10	0 102 63		6.3				
10	0 102 96 <sup>1</sup>		10	250	500		
			<b>Cylindrical</b>				
			<b>6.3 x 23</b>				
			Rating (Amps)	Voltage ~ (Volts)	Rupture capacity (Amps) Copper	Protected section (mm <sup>2</sup> )	Color Indication
10	Without indicator	With indicator	6	230	6000	1.5	
	0 103 06 <sup>2</sup>		<b>8.5 x 23</b>				
10		0 114 06	6	230	6000		
10		0 113 10	10			1.5	
			<b>10.3 x 25.8</b>				
10		0 116 10 <sup>2</sup>	10	230	6000		
10		0 116 16 <sup>2</sup>	16			2.5	
			<b>8.5 x 31.5</b>				
10		0 123 20	20	400	20000	2.5	
		0 124 20	<b>10.3 x 31.5</b>				
10		0 126 16	16				
10		0 126 20	20	400	20000		
10		0 126 25	25			4	
		0 127 25	<b>10.3 x 38</b>				
10		0 133 32	32	400	20000		
10		0 134 32	32			6	
			<b>Neutral links</b>				
10		0 123 00	8 x 32 (previously 8.5 x 31.5)				
10		0 133 00	10 x 38				

1: Overrating not described by standards  
 2: Conform to BS 1361 (1971)