


MPCBs MPX³

accessories

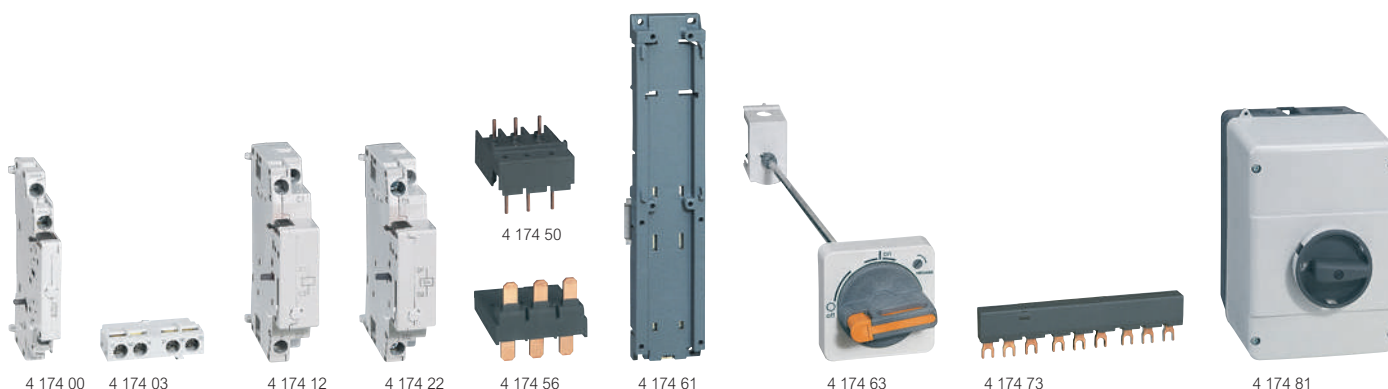

| Pack | Cat. Nos | Auxiliary contacts | Pack | Cat. Nos | Direct adaptor and mounting unit |
|------|----------|--|------|----------|---|
| | | 2-pole | | | For mounting CTX ³ contactors under MPX ³ MPCBs |
| | | Side mounting | | | Direct adaptators |
| | | Mounting on the left side of MPCBs | | | N Used to connect MPX ³ directly with the contactor |
| | | One module per MPCB | 2 | 4 174 40 | For MPX ³ 32S with CTX ³ mini AC (p. 184) |
| 2 | 4 174 00 | 1 NO + 1 NC | 2 | 4 174 41 | For MPX ³ 32S with CTX ³ mini DC (p. 184) |
| 2 | 4 174 01 | 2 NO | 2 | 4 174 42 | For MPX ³ 32H/32MA with CTX ³ mini AC (p. 184) |
| 2 | 4 174 02 | 2 NC | 2 | 4 174 43 | For MPX ³ 32H/32MA with CTX ³ mini DC (p. 184) |
| | | Front mounting | 2 | 4 174 48 | For MPX ³ 32S with CTX ³ 22 AC (p. 184) |
| | | One module per MPCB | 2 | 4 174 49 | For MPX ³ 32S with CTX ³ 22 DC (p. 184) |
| 10 | 4 174 03 | 1 NO + 1 NC | 2 | 4 174 50 | For MPX ³ 32H/32MA with CTX ³ 22 AC (p. 184) |
| 10 | 4 174 04 | 2 NO | 2 | 4 174 51 | For MPX ³ 32H/32MA with CTX ³ 22 DC (p. 184) |
| 10 | 4 174 05 | 2 NC | 2 | 4 174 52 | For MPX ³ 32S with CTX ³ 40 AC (p. 184) |
| | | Alarm contacts | 2 | 4 174 53 | For MPX ³ 32S with CTX ³ 40 DC (p. 184) |
| | | 1 NO + 1 NC | 2 | 4 174 54 | For MPX ³ 32H/32MA with CTX ³ 40 AC (p. 184) |
| | | Any trip alarm contact | 2 | 4 174 55 | For MPX ³ 32H/32MA with CTX ³ 40 DC (p. 184) |
| | | Operate in case of trip | 2 | 4 174 56 | For MPX ³ 63H with CTX ³ 65 AC with lug type terminals (p. 184) |
| | | Mounting on the left side of MPCBs | 2 | 4 174 57 | For MPX ³ 63H with CTX ³ 65 DC with cage type terminals (p. 184) |
| | | Set alarm contact first in case of using auxiliary contact together (MPX ³ 63H can not accept auxiliary contact and alarm contact together) | 1 | 4 174 58 | For MPX ³ 100H with CTX ³ 100 AC with cage type terminals (p. 184) |
| 1 | 4 174 06 | For MPX ³ 32 | 1 | 4 174 59 | For MPX ³ 100H with CTX ³ 100 DC with cage type terminals (p. 184) |
| 1 | 4 174 08 | For MPX ³ 63 and 100 | | | Mounting unit |
| | | Magnetic trip alarm contact | | | This device is used for joining together MPX ³ MPCBs and CTX ³ contactors |
| | | Operate in case of instantaneous trip | | | Screws not supplied |
| | | Mounting on the left side of MPCBs | 1 | 4 174 60 | For MPX ³ 32S/32H/32MA |
| | | Set alarm contact first in case of using auxiliary contact together | 1 | 4 174 61 | For MPX ³ 63H |
| 2 | 4 174 07 | 1 NO + 1 NC | 1 | 4 174 62 | For MPX ³ 100H |
| | | Shunt release | | | Rotary handle |
| | | Mounting on the right side of MPCBs | | | Mounting on panel's door to control the MPX ³ |
| | | One release per MPCB | 1 | 4 174 63 | For MPX ³ 32H and 32 MA |
| 1 | 4 174 10 | 24 V - 50 Hz / 28 V - 60 Hz | 1 | 4 174 64 | For MPX ³ 63H |
| 1 | 4 174 11 | 110 V - 50 Hz / 120 V - 60 Hz | 1 | 4 174 65 | For MPX ³ 100H |
| 1 | 4 174 12 | 220-230 V - 50 Hz / 240-260 V - 60 Hz | | | Phase busbar |
| 1 | 4 174 13 | 380-400 V - 50 Hz / 440-460 V - 60 Hz | | | For parallel connection of MPX ³ |
| | | Undervoltage release | | | For MPX³ 32S, 32H and 32MA |
| | | Mounting on the right side of MPCBs | 10 | 4 174 71 | 2 devices - rated current 63 A |
| | | One release per MPCB | 10 | 4 174 73 | 3 devices - rated current 63 A |
| | | Without auxiliary contact | 10 | 4 174 75 | 4 devices - rated current 63 A |
| 1 | 4 174 20 | 24 V - 50 Hz / 28 V - 60 Hz | 10 | 4 174 76 | 5 devices - rated current 63 A |
| 1 | 4 174 21 | 110 V - 50 Hz / 120 V - 60 Hz | 4 | 4 174 77 | Feeder for phase busbar - rated current 32 A |
| 1 | 4 174 22 | 220-230 V - 50 Hz / 240-260 V - 60 Hz | | | For MPX³ 63H |
| 1 | 4 174 23 | 380-400 V - 50 Hz / 440-460 V - 60 Hz | | | Rated current 108 A |
| | | With 2 NO auxiliary contacts | 4 | 4 174 72 | 2 devices |
| | | Can not attach to MPX ³ 32S | 4 | 4 174 74 | 3 devices |
| 1 | 4 174 30 | 24 V - 50 Hz / 28 V - 60 Hz | | | Enclosures for MPX³ 32H and 32MA |
| 1 | 4 174 31 | 110 V - 50 Hz / 120 V - 60 Hz | 1 | 4 174 80 | IP 65 enclosure to use in dusty areas as well as in presence of corrosive gas or liquid |
| 1 | 4 174 32 | 220-230 V - 50 Hz / 240-260 V - 60 Hz | 1 | 4 174 81 | Yellow/red rotary handle |
| 1 | 4 174 33 | 380-400 V - 50 Hz / 440-460 V - 60 Hz | | | With black rotary handle |
| | | Dial Cover | | | |
| | | Sealable cover to protect the set value from the operation that is not intended | | | |
| 400 | 4 174 79 | For all types of MPX ³ | | | |