



Uprights, rails and fixing accessories for cabinets and enclosures

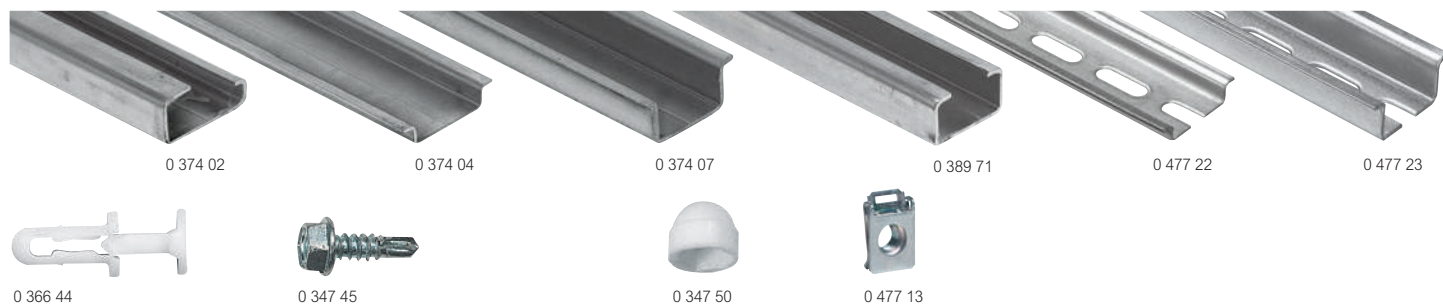


For mounting chassis and fixing wiring accessories

Pack	Cat.Nos	Uprights to be cut
10	0 361 92	Lina 25 Length 3 m - L Section
10	0 389 71	On C profile rail C Section
Rails to be cut		
10	0 374 02	Length 2 m EN 60 715
10	0 374 04	EN 60 715 depth 7.5 mm
10	0 374 07	depth 15 mm
10	0 389 71	C Section
10	0 477 22	depth 7.5 mm with oblongs
10	0 477 23	depth 15 mm with oblongs
45° mounting bracket		
10	0 394 49	Set of 2 supports for 45° rail slope Supplied with 4 M6 screws Ø6 mm, nuts and washers
Fixing accessories		
100	0 347 46	On plain plates CBL Z 5.5 x 16 PZ No 3 self-tapping screw
100	0 347 47	CBL Z 5.5 x 19 self-drilling tapping screw
500	0 366 44 ¹	On Lina 12.5 plates Rivet reinforced plastic Ø6 mm for drilling Ø6.5 mm
100	0 347 45	Screw head H 4.8 x 16 mm self-drilling, self-tapping for Ø3.3 mm
200	0 347 50	Screw caps for isolation of screw head Cat.No 0 347 45
On Lina 25 perforated plates		
100	0 364 40	Clip-nuts supplied without screw
100	0 364 41	For M4 screws
100	0 364 42	For M5 screws
On cabinet frame and crosspieces		
50	0 477 12	Clip-nuts with pins which provide earth continuity For M6 screws
50	0 477 13	For M8 screws
On rails EN 60 715		
100	0 364 61	Fixobar for M4 screws
100	0 364 62	Fixobar for M5 screws
100	0 364 63	Fixobar for M6 screws

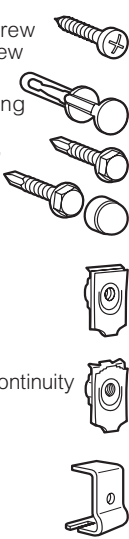

Pack	Cat.Nos	Fixing accessories (continued)
20	0 364 66	Adaptor For mounting on rail C equipment fitting on rail L Width 17 mm Increase equipment height of 6 mm
100	0 364 78	On rails EN 60 715 C L For M4 screws
100	0 364 79	For M6 screws
10	0 044 16	On rails EN 60 715 L Claw width 10 mm
50	0 044 17	Threaded hole for M4 screw Claw width 17.5 mm Smooth hole 3.8 mm Supplied with fixing screw Ø3.5 mm Length 13 mm
100	0 374 39	Claw width 35 mm Holes for M4 and M6 screws
40	0 364 69	Fixomega for M4 screws
On C profile rail		
100	0 364 82	Stirrup for M6 screws
20	0 367 60	Nut with CBL screw 6 x 10
Cage nuts		
20	0 364 50	For mounting on square perforation 8.3 x 8.3 mm M4
20	0 364 51	M5
20	0 364 52	M6
50	0 367 75	HF screw with contact washer M 6-10 HF screws with contact washers

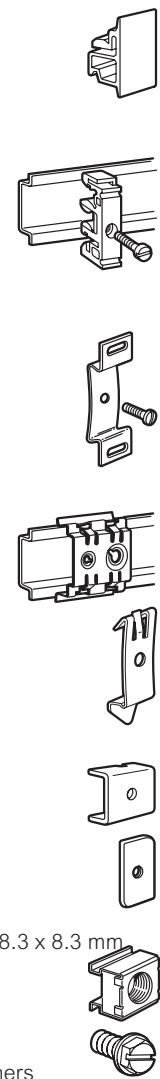

1: Can also be used on Lina 25 perforated plate