


Viking™ 3 terminal blocks with screw connection

for copper cables (continued)

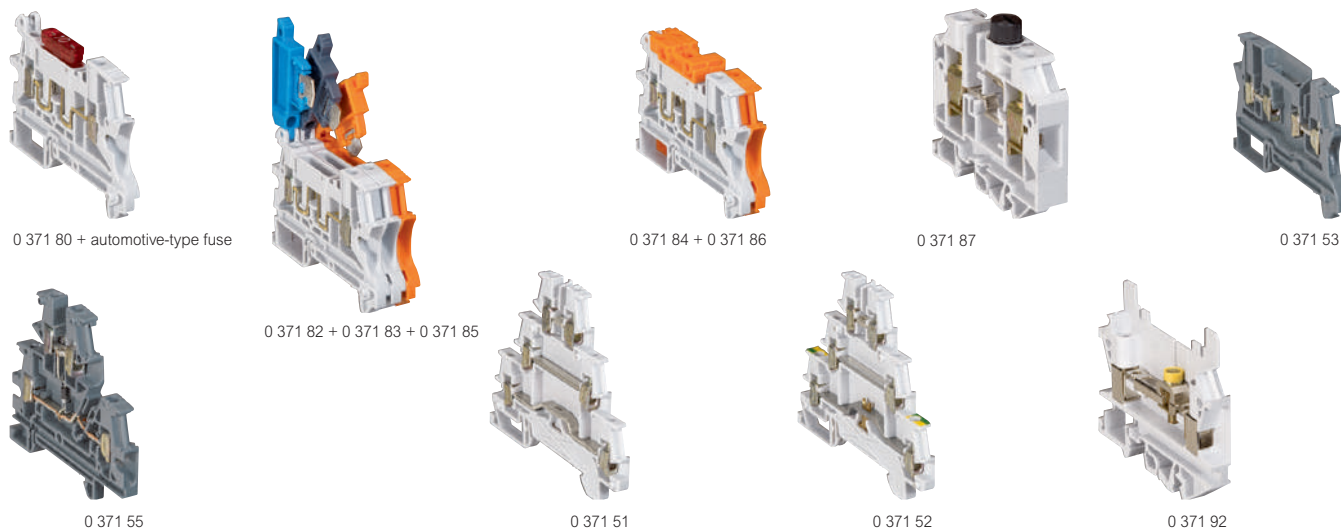

Technical characteristics **p. 335** dimensions **see e-catalogue**
 Approvals **p. 919**

Used to make the electrical connection between 2 flexible copper wires with or without ferrules or 2 rigid copper wires
 2 areas for automatic insertion bridging combs up to 8 pitch (upper level only for multi-level blocks)
 For rails depth 15 mm, EN 60715 depth 7.5 mm and 15 mm

Pack	Cat.Nos	Disconnect terminal blocks 1 connection				
		Opening by means of blade type lever, handle lever or mini lever (with tool)				
		Open (to be equipped)				
		Can take blade type levers Cat.Nos 0 375 15/16/17/18 or in ELV installations a blade-type automotive fuse or a miniature circuit-breaker				
		Colour	Nominal cross-section (mm ²)	Rigid wire (mm ²)	Capacity Flexible wire (mm ²) with or without ferrules	Pitch (mm)
20	0 371 80	Grey	2.5	0.25 to 2.5	0.25 to 2.5	6
20	0 371 81	For fuse cartridge 5 x 20 with handle lever				
20	0 371 82	Grey/blue	2.5	0.25 to 2.5	0.25 to 2.5	6
20	0 371 83	For standard circuit with handle lever				
20	0 371 84	Grey	2.5	0.25 to 2.5	0.25 to 2.5	6
20	0 371 85	For circuit not broken with handle lever				
20	0 371 85	Orange	2.5	0.25 to 2.5	0.25 to 2.5	6
20	0 371 86	For circuit not broken with mini lever				
20	0 371 86	Orange	2.5	0.25 to 2.5	0.25 to 2.5	6
20	0 371 87	For cartridge 5 x 20 with screwed plug				
20	0 371 87	Grey	10	0.25 to 10	0.25 to 10	12

Pack	Cat.Nos	Function blocks				
		1 connection - modular				
		Component connected with screws				
		Colour	Nominal cross-section (mm ²)	Rigid wire (mm ²)	Capacity Flexible wire (mm ²) with or without ferrules	Pitch (mm)
20	0 371 53	Grey	2.5	0.25 to 4	0.25 to 2.5	5
20	0 371 54	1 connection - diode carrier				
60	0 371 55	Grey	4	0.25 to 6	0.25 to 4	6
60	0 371 56	2 connections on 2 levels - with LED				
60	0 371 56	Voltage presence indicator (12/24V _{DC} and ~)				
60	0 371 56	Grey	4	0.25 to 6	0.25 to 4	6

Pack	Cat.Nos	For sensors and actuators				
		For connecting sensors (Cat.No 0 371 51) or actuators (Cat.No 0 371 52), and their shared power supply unit using equipotential bridging comb Cat.Nos 0 375 46/47				
		3 connections on 3 levels - for sensor				
		Colour	Nominal cross-section (mm ²)	Rigid wire (mm ²)	Capacity Flexible wire (mm ²) with or without ferrules	Pitch (mm)
50	0 371 51 ¹	Grey	2.5	0.25 to 4	0.25 to 2.5	5
50	0 371 52 ¹	3 connections on 3 levels - for actuator				
50	0 371 52 ¹	Grey	2.5	0.25 to 4	0.25 to 2.5	5
		Disconnect for measurement				
		1 connection				
		With its accessories, allows intervention (measurements, maintenance, etc) on a current, voltage and power measuring circuit by keeping the current transformer secondary circuit closed				
		Colour	Nominal cross-section (mm ²)	Rigid wire (mm ²)	Capacity Flexible wire (mm ²) with or without ferrules	Pitch (mm)
25	0 371 92	Grey	4	0.25 to 4	0.25 to 4	8

1: Rigid wire capacity: 2.5 mm² max with equipotential bridging comb

For detailed dimensions, **see e-catalogue**



Blade type levers, joining rods and blown fuse indicators **p. 333**
 Accessories **p. 332**