


Equipment transformers

single-phase




0 428 40 +
0 428 99



connection strip
supplied up to 450 V \sim
(except Cat.No 0 428 46)



0 428 41 supplied with connection strip

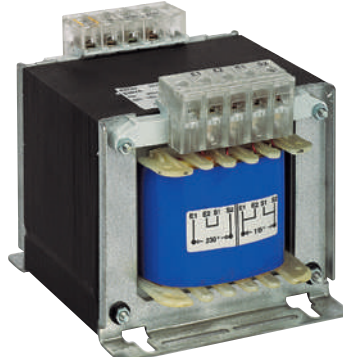

0 427 92

Technical characteristics **p. 365**

IP 2X or XXB up to 450 V \sim - up to 310 V \sim in 12-24 V - (coupling strip not mounted) - IK 04
 Clip on fixing possibility up to 160 V \sim with accessories Cat.No 0 044 16 or 0 428 99
 Transformers with 2 secondary voltage supplied with coupling strip
 Transformers up to 450 V \sim supplied with isolated strip for 0 V connection secondary / earth (except Cat.No 0 428 46)
 Conform to IEC EN 61558-2-6 for 12 V, 24 V and 48 V and conform to IEC EN 61558-2-4 for 115 V and 230 V
 Products suitable for building equipment conforming to standards EN 61131-2, EN 60204-1 and EN 61 439-1

Pack	Cat.Nos	Safety		
		Input voltage = 230-400 V\sim Output voltage = 12-24 V\sim		
		Power (V \sim)	Primary terminal flexible cable (mm ²)	Secondary terminal flexible cable (mm ²)
1	0 428 40	40	1 to 4	1 to 4
1	0 428 41	63	1 to 4	1 to 4
1	0 428 42	100	1 to 4	1 to 4
1	0 428 43	160	1 to 4	1 to 4
1	0 428 44	220	1 to 4	1 to 4
1	0 428 45	310	1 to 4	1 to 4
1	0 428 46	450	1 to 4	1 to 16
1	0 428 47	630	1 to 4	1 to 16
1	0 428 49	1000	0.25 to 6	4 to 35
		Input voltage = 230-400 V\sim Output voltage = 24 V\sim		
1	0 428 55	40	1 to 4	1 to 4
1	0 428 56	63	1 to 4	1 to 4
1	0 428 57	100	1 to 4	1 to 4
1	0 428 58	160	1 to 4	1 to 4
1	0 428 59	220	1 to 4	1 to 4
1	0 428 60	310	1 to 4	1 to 4
1	0 428 61	450	1 to 4	1 to 4
1	0 428 62	630	1 to 4	1 to 16
		Input voltage = 230-400 V\sim Output voltage = 24-48 V\sim		
1	0 428 70	40	1 to 4	1 to 4
1	0 428 71	63	1 to 4	1 to 4
1	0 428 72	100	1 to 4	1 to 4
1	0 428 73	160	1 to 4	1 to 4
1	0 428 74	220	1 to 4	1 to 4
1	0 428 75	310	1 to 4	1 to 4
1	0 428 76	450	1 to 4	1 to 4
1	0 428 77	630	1 to 4	1 to 16

Pack	Cat.Nos	Circuits isolation		
		Input voltage = 230-400 V\sim Output voltage = 115-230 V\sim		
		Power (V \sim)	Primary terminal flexible cable (mm ²)	Secondary terminal flexible cable (mm ²)
1	0 427 85	40	1 to 4	1 to 4
1	0 427 86	63	1 to 4	1 to 4
1	0 427 87	100	1 to 4	1 to 4
1	0 427 88	160	1 to 4	1 to 4
1	0 427 89	220	1 to 4	1 to 4
1	0 427 90	310	1 to 4	1 to 4
1	0 427 91	450	1 to 4	1 to 4
1	0 427 92	630	1 to 4	1 to 4

Pack	Cat.Nos	Accessories
		For clip on rail (90° mounting) of transformers up to 160 V \sim with 2 claws
5	0 428 99	Plate
10	0 044 16	Claw width 10 mm Threaded hole For M4 screw

Isolating transformers for hospitals (IEC 61558-2-15), **p. 917**

