


Legrand cabling system LCS³ fibre optic

patch cords

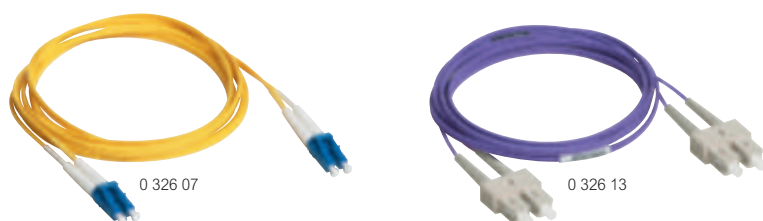

Fitted with ceramic ferrule connectors on each end. Individually packed and tested (report supplied). Zipcord LSZH sheath

Pack	Cat.Nos	OS 1/OS 2 (UPC) single-mode optical cords	Pack	Cat.Nos	OM 2 multimode fibre optic cords (50/125 µm)
		Optic losses max/Master: 0.25 dB For single-mode installations 9/125 µm, type OS 1/ OS 2. Yellow sheaths			Optic losses max/Master: 0.25 dB For multimode installations 50/125 µm, type OM2 Orange sheaths
		SC/SC duplex cords			ST/ST duplex cords
3	0 326 00	Length: 1 m	3	0 330 80	Length: 1 m
3	0 326 01	Length: 2 m	3	0 330 81	Length: 2 m
3	0 326 02	Length: 3 m	3	0 330 82	Length: 3 m
		SC/LC duplex cords			SC/SC duplex cords
3	0 326 03	Length: 1 m	3	0 330 69	Length: 1 m
3	0 326 04	Length: 2 m	3	0 330 70	Length: 2 m
3	0 326 05	Length: 3 m	3	0 330 71	Length: 3 m
		LC/LC duplex cords			ST/SC duplex cords
3	0 326 28	Length: 0.5 m	3	0 330 72	Length: 2 m
3	0 326 06	Length: 1 m	3	0 330 73	Length: 3 m
3	0 326 07	Length: 2 m			LC/LC duplex cords
3	0 326 08	Length: 3 m	3	0 330 61	Length: 2 m
3	0 326 29	Length: 5 m			SC/LC duplex cords
		LC/LC Uniboot duplex cords	3	0 330 75	Length: 1 m
		Reversible polarity	3	0 330 63	Length: 2 m
3	0 326 86	Length: 1 m	3	0 330 76	Length: 3 m
3	0 326 87	Length: 2 m			LC/ST duplex cords
3	0 326 88	Length: 3 m	3	0 330 65	Length: 2 m
3	0 326 89	Length: 5 m			
3	0 326 92	Length: 10 m			
		OM 4 multimode fibre optic cords (50/125 µm)			Fibre optic feedthrough sockets
		Suitable for 10 Giga Ethernet networks Optic losses max/Master: 0.15 dB For multimode installations 50/125 µm, type OM 4 Aqua sheaths			Equipped with 2 inputs / 2 outputs duplex feedthrough Enable the connection of two fibre optics (fitted with their connectors) Supplied with protection caps Equipped with a clear nameplate holder 2 modules
		SC/SC duplex cords			2 x ST fibre optic feedthrough socket
3	0 326 30	Length: 1 m			Bayonet mount (STII compatible)
3	0 326 31	Length: 2 m	1	0 786 16	○ White
3	0 326 32	Length: 3 m			2 x SC fibre optic feedthrough socket
		LC/LC duplex cords			"Push-pull" connection
3	0 326 33	Length: 0.5 m	1	0 786 17	○ White
3	0 326 34	Length: 1 m			2 x LC fibre optic feedthrough socket
3	0 326 35	Length: 2 m			"Push-pull" connection
3	0 326 36	Length: 3 m	1	0 786 18	○ White
3	0 326 37	Length: 5 m			Socket with fibre optic feedthrough 2 x SC/APC
		LC/LC Uniboot duplex cords			Push-pull connection With shutters
		Reversible polarity	1	0 786 14	○ White
3	0 326 95	Length: 1 m			
3	0 326 96	Length: 2 m			
3	0 326 97	Length: 3 m			
3	0 326 98	Length: 5 m			
3	0 326 99	Length: 10 m			
		OM 3 multimode fibre optic cords (50/125 µm)			
		Suitable for 10 Giga Ethernet networks Optic losses max/Master: 0.25 dB For multimode installations 50/125 µm, type OM 3 Aqua sheaths			
		SC/SC duplex cords			
3	0 326 09	Length: 1 m			
3	0 326 10	Length: 2 m			
3	0 326 11	Length: 3 m			
		SC/LC duplex cords			
3	0 326 12	Length: 1 m			
3	0 326 13	Length: 2 m			
3	0 326 14	Length: 3 m			
		LC/LC duplex cords			
3	0 326 15	Length: 1 m			
3	0 326 16	Length: 2 m			
3	0 326 17	Length: 3 m			