


# Legrand cabling system LCS<sup>3</sup> Enclosures

server cabinets and cable entries

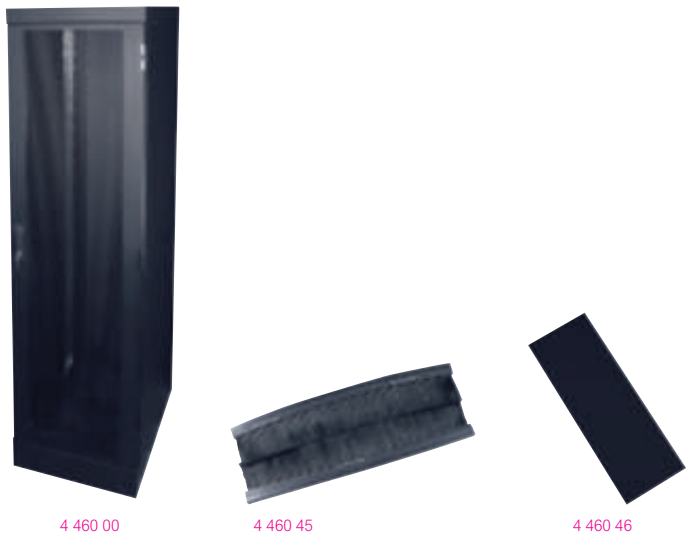

Colour: RAL 9011 (black)

Frame: aluminium, demountable

Load capacity: 1500 kg (static)

80 % perforated front door and 80 % perforated double rear doors: all doors are fitted with a Fix-easy swivel handle with a snap-in blind plug for profile-cylinder

Roof: 3 or 4 cut outs with 2 or 3 blind plates and 1 cable entry brush depending on the frame size

Interior: cabinet equipped with 4 x 19" profiles including height (U) indication

Distance to the cabinet front: set to 80 mm (pitch set to 740 mm)

Cabinet equipped with two cable trays for cable management. Special features include toolless-mounting key holes for mounting vertical PDU's and fixation points to mount Plastic Cable Rings (Cat.No 4 460 57)

Cabinets supplied with 20 cage nuts and screws

Server cabinets delivered without side panels

Server cabinets with airflow management are supplied with an airflow management package keeping the loss of air to a minimum, thus improving energy efficiency

## LCS<sup>3</sup> 19" server cabinets

Pack	Cat.Nos	Capacity	Width (mm)	Depth (mm)
1	4 460 00	42 U	600	1000
1	4 460 01	42 U	600	1100
1	4 460 02	42 U	600	1200
1	4 460 03	42 U	800	1000
1	4 460 04	42 U	800	1100
1	4 460 05	42 U	800	1200
1	4 460 06	46 U	600	1000
1	4 460 07	46 U	600	1100
1	4 460 08	46 U	600	1200
1	4 460 09	46 U	800	1000
1	4 460 10	46 U	800	1100
1	4 460 11	46 U	800	1200

## LCS<sup>3</sup> 19" server cabinets with airflow management

Pack	Cat.Nos	Capacity	Width (mm)	Depth (mm)
1	4 460 12	42 U	600	1000
1	4 460 13	42 U	600	1100
1	4 460 14	42 U	600	1200
1	4 460 15	42 U	800	1000
1	4 460 16	42 U	800	1100
1	4 460 17	42 U	800	1200
1	4 460 18	46 U	600	1000
1	4 460 19	46 U	600	1100
1	4 460 20	46 U	600	1200
1	4 460 21	46 U	800	1000
1	4 460 22	46 U	800	1100
1	4 460 23	46 U	800	1200

## LCS<sup>3</sup> side panels for server cabinet, set of 2, including plinths

Pack	Cat.Nos	Capacity	Width (mm)	Depth (mm)
1	4 460 24	42 U	-	1000
1	4 460 25	42 U	-	1100
1	4 460 26	42 U	-	1200
1	4 460 27	46 U	-	1000
1	4 460 28	46 U	-	1100
1	4 460 29	46 U	-	1200

## LCS<sup>3</sup> Flatpack server cabinets, including side panels

Flatpack cabinets have the same configuration as Cat.Nos 4 460 00 to 4 460 11 respectively

Pack	Cat.Nos	Capacity	Width (mm)	Depth (mm)
1	4 460 30	42 U	600	1000
1	4 460 31	42 U	600	1100
1	4 460 32	42 U	600	1200
1	4 460 33	42 U	800	1000
1	4 460 34	42 U	800	1100
1	4 460 35	42 U	800	1200
1	4 460 36	46 U	600	1000
1	4 460 37	46 U	600	1100
1	4 460 38	46 U	600	1200
1	4 460 39	46 U	800	1000
1	4 460 40	46 U	800	1100
1	4 460 41	46 U	800	1200

## Insert modules

For filling the cut-aways of a cabinet's roof and/or floor plate

1	4 460 45	Cable entry brushes (set)	Max. cross-section 405 x 115 mm
1	4 460 46	Covering plate RAL 9011	153 x 427 mm