


# Rigid cover DLP-S universal trunking 190 x 50


75 mm cover

Cat.Nos for trunking 190 x 50

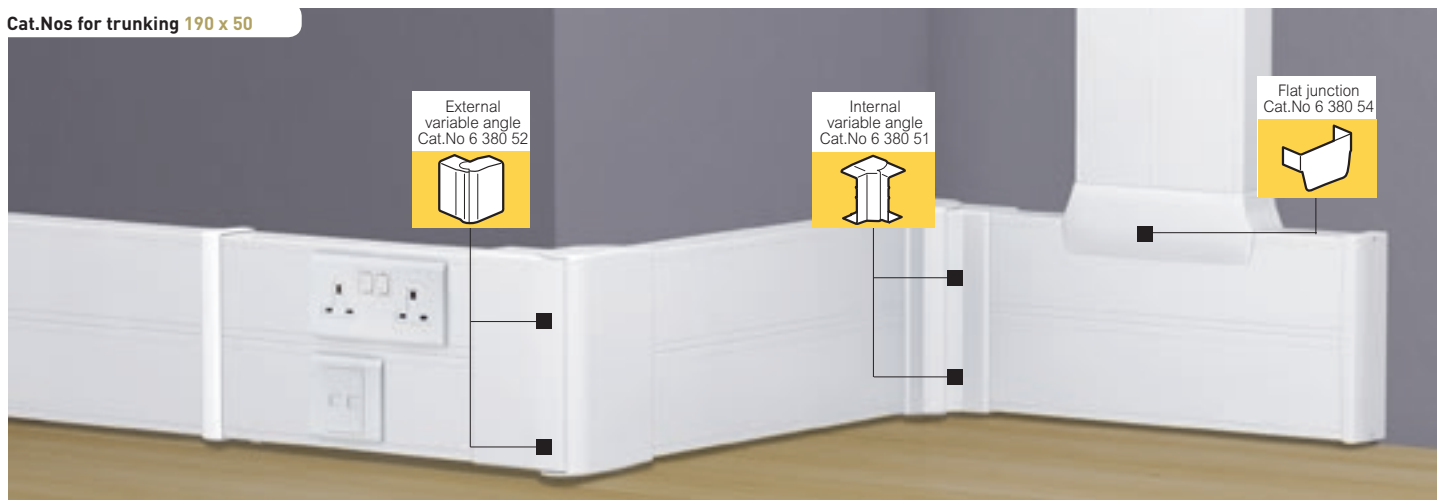

Selection chart (p. 834-835)  
Technical characteristics see e-catalogue

Pack	Cat.Nos	Rigid cover universal trunking
8'	190 x 50 6 380 50	<b>2-compartment trunking</b> Includes: - 1 body - 2 covers width 75 mm Supplied in 4 units of 2 m length Can take : - 45 mm wiring accessories (Arteor or Mosaic) with 75 mm cover support frames (p. 837) - British standard wiring devices (Belanko, Mallia, Synergy) with universal support Cat.No 6 380 05 (p. 837)
32'	6 380 08	<b>Partition</b> Separation partition Length 2 m
10	6 380 56	<b>Body joint</b> For aligning trunking body during installation
50	6 380 01	<b>Cover joint</b> Cover joint for 75 mm cover
10	190 x 50 6 380 51	<b>Angles</b> Internal angle from 80° to 120°
10	6 380 52	External angle from 60° to 120°
5	6 380 53	Flat angle at 90°
10	190 x 50 6 380 55	<b>End cap</b> End cap
5	190 x 50 6 380 54	<b>Flat junction</b> Creates a junction between 100 x 50 mm vertical trunking and any other size of the range



Pack	Cat.Nos	Supports for 45 mm wiring devices
10	6 380 71	For mounting Arteor wiring accessories Clip-on supports, which can be fitted side by side Supplied with white finishing plate For cover 75 mm width For 2 modules
5	6 380 72	For 4 modules
5	6 380 73	For 6 modules
10	6 380 05	<b>Universal support</b> British standard wiring devices such as Belanko, Mallia or Synergy ranges For cover 75 mm width
5	6 117 88	For 60 mm fixing centres wiring devices such as Niloé, Kaptika or Mosaic Programme (equipped with support frame and plate) For cover 75 mm width

1: Number of meters in pack



British standard socket outlets  
p. 551



RJ 45 socket outlets  
p. 550

