


# Flush version floor boxes for concrete floor

## selection chart



| SOCKET MOUNTING POSITION         | CAPACITY              | FLOOR BOX SUPPORT KIT | BACKBOXES  |   | LID FLOORING THICKNESS ≤ 15 MM                  | FINISHING PLATE (OPTIONAL) |                 |          |
|----------------------------------|-----------------------|-----------------------|--|---|---|----------------------------|-----------------|----------|
|                                  |                       |                       | AUTO-ADJUSTING BACKBOX FOR SCREED HEIGHT 65 TO 90 MM       | UNIVERSAL ADJUSTABLE BACKBOX FOR SCREED HEIGHT 55 TO 150 MM |   |                            |                 |          |
|                                  |                       |                       |  |   |   |                            |                 |          |
|                                  |                       |                       | 0 880 91   | 0 880 80  | Metal lid Cat.No 0 881 05 + kit Cat.No 0 881 41 |                            |                 |          |
| <b>Adjustable horizontal</b><br> | 12 (3 x 4) modules    | 0 881 20              | 0 880 90 <sup>(1)</sup><br>screed height + coating ≥ 92 mm | 0 880 80 + 0 880 81<br>screed height ≥ 100 mm               | Stainless steel                                 | 0 881 03                   | Stainless steel | 0 881 45 |
|                                  |                       |                       |  |   | Brass   | 0 881 06                   | Brass           | 0 881 48 |
|                                  | 18 (3 x 6) modules    | 0 881 21              | 0 880 90 <sup>(1)</sup><br>screed height + coating ≥ 92 mm | 0 880 80 + 0 880 82<br>screed height ≥ 100 mm               | Stainless steel                                 | 0 881 04                   | Stainless steel | 0 881 46 |
|                                  |                       |                       |  |   | Brass   | 0 881 07                   | Brass           | 0 881 49 |
|                                  | 24 (3 x 8) modules    | 0 881 22              | 0 880 90 <sup>(1)</sup><br>screed height + coating ≥ 92 mm | 0 880 80 + 0 880 83<br>screed height ≥ 100 mm               | Stainless steel                                 | 0 881 05                   | Stainless steel | 0 881 47 |
|                                  |                       |                       |  |   | Brass   | 0 881 08                   | Brass           | 0 881 50 |
| <b>Vertical</b><br>              | 8 (2 x 4) modules     | 0 881 23              | 0 880 90   | OR 0 880 80 + 0 880 81                                      | Stainless steel                                 | 0 881 03                   | Stainless steel | 0 881 45 |
|                                  |                       |                       |  |   | Brass   | 0 881 06                   | Brass           | 0 881 48 |
|                                  | 12 (2 x 6) modules    | 0 881 24              | 0 880 91   | OR 0 880 80 + 0 880 82                                      | Stainless steel                                 | 0 881 04                   | Stainless steel | 0 881 46 |
|                                  |                       |                       |  |   | Brass   | 0 881 07                   | Brass           | 0 881 49 |
|                                  | 16 (2 x 8) modules    | 0 881 25              | 0 880 92   | OR 0 880 80 + 0 880 83                                      | Stainless steel                                 | 0 881 05                   | Stainless steel | 0 881 47 |
|                                  |                       |                       |  |   | Brass   | 0 881 08                   | Brass           | 0 881 50 |
| <b>Access cover</b><br>          | For lid 8/12 modules  | 0 881 39              | 0 880 90   | OR 0 880 80 + 0 880 81                                      | Stainless steel                                 | 0 881 03                   | Stainless steel | 0 881 45 |
|                                  |                       |                       |  |   | Brass   | 0 881 06                   | Brass           | 0 881 48 |
|                                  | For lid 12/18 modules | 0 881 40              | 0 880 91   | OR 0 880 80 + 0 880 82                                      | Stainless steel                                 | 0 881 04                   | Stainless steel | 0 881 46 |
|                                  |                       |                       |  |   | Brass   | 0 881 07                   | Brass           | 0 881 49 |
|                                  | For lid 16/24 modules | 0 881 41              | 0 880 92   | OR 0 880 80 + 0 880 83                                      | Stainless steel                                 | 0 881 05                   | Stainless steel | 0 881 47 |
|                                  |                       |                       |  |   | Brass   | 0 881 08                   | Brass           | 0 881 50 |

### MOUNTING PRINCIPLE

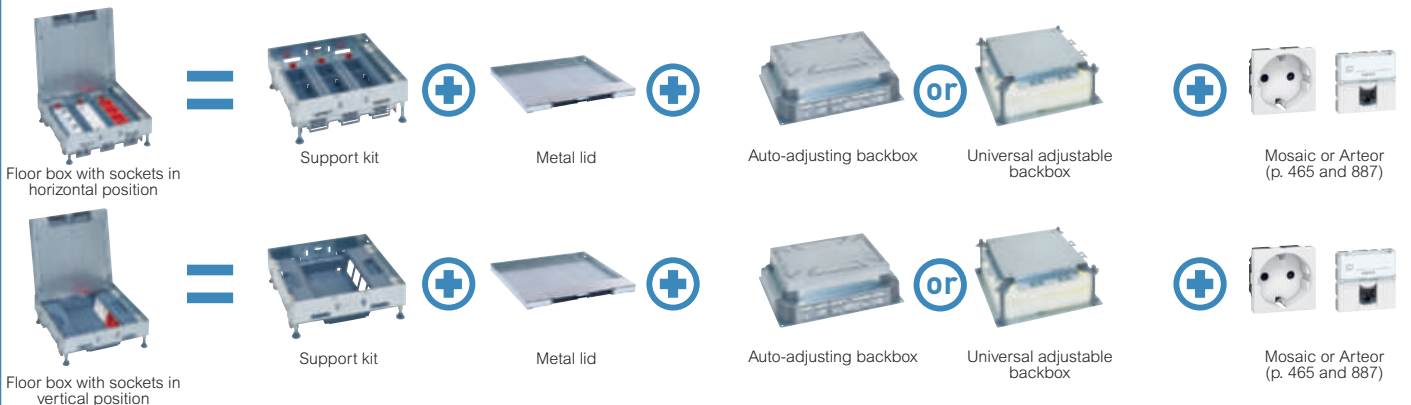

1: Not possible to use straight plugs