


Light sensitive switches

Standard light sensitive switch

Cat.No 4 126 23 with photoelectric cell Cat.No 4 128 60
 Switch "ON" and "OFF" defined by a light level threshold

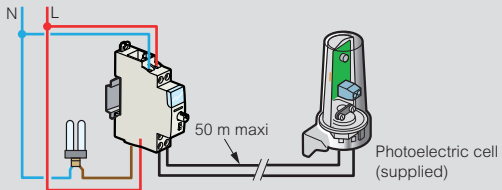

Programmable light sensitive switch

Cat.No 4 126 26 with photoelectric cell Cat.No 4 128 60

56 programmes possible (daily, weekly programmes)
 Controls lighting according to the time and light level
 Minimum switching interval: 1 minute
 Working reserve: 5 years
 Manual switch: override/programme/stop
 Automatic changeover between summer/winter time
 Temporary override with automatic return to programme

