


Surface-mounted power sockets French standard

Cat. No(s): 0 860 22/25/27/65/76/78
 0 861 22/25/27/55/78



0 861 27

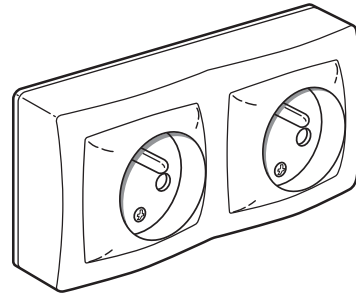

0 860 76

1. USE


Power sockets 16 A conforming to french standard.
 Devices supplied complete or modular mechanisms.

2. RANGE

Description	Comple Unit	Modular component
2 P socket outlets with shutters	0 860 22	0 861 22
2 P socket outlets Special for Spain market	0 860 25	0 861 25
2 P+E socket outlets without shutters	0 860 27	0 861 27
2 P+E socket outlet tamperproof	-	0 861 55
2-gang: 2-way + 2 P+E	0 860 65	-
2-gang: 2 x 2 P+E Use vertically and horizontally	0 860 76	-
2-gang: 2 x 2 P+E wired Use vertically	0 860 78	0 861 78


3. OVERALL DIMENSIONS (mm)

Comple unit

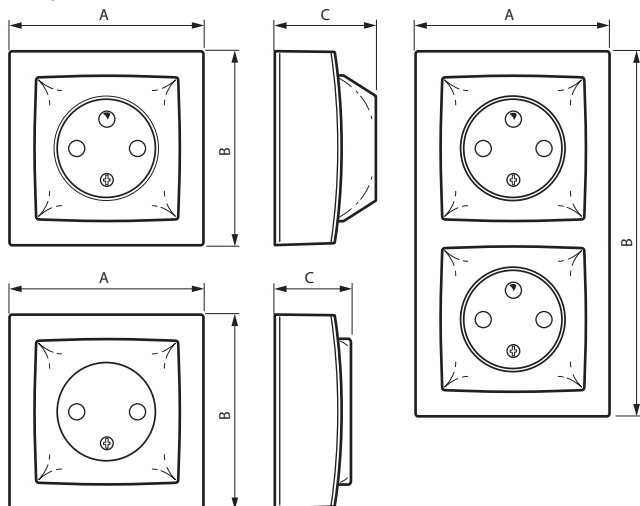

3. OVERALL DIMENSIONS (mm) (continued)

Modular component

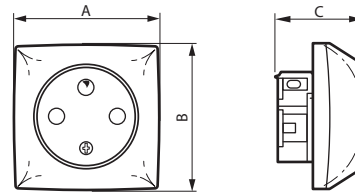

References	A	B	C
0 860 22	72	72	28
0 860 27	72	72	38
0 861 22	54	54	26
0 861 27	54	54	36
0 861 55	54	54	38
0 860 65/76	72	136	38
0 860 78	72	72	38
0 861 78	54	54	36

4. CONNEXION

■ 4.1 Cat. Nos. 0 860 22 - 0 861 22 / 55

Terminal type: with screws
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 10 mm
 Screwdriver: Posidrive 1, Philips 1, flat blade 4 mm.

■ 4.2 Cat. Nos. 0 860 27/76/78 - 0 861 27/78

Terminal type: autotomatic
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 13 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Protection against solid bodies and liquids: IP 31D (complete product)
Protection against mechanical impact: IK 04

■ 5.2 Material characteristics

Plate: ABS
Framework: ABS
Cover plate: PC
Colour: White RAL 9003
UV resistance
Self-extinguishing:
+ 850° C / 30 s for insulating components holding in place live parts.
+ 650° C / 30 s for the other insulating components.

■ 5.3 Electric characteristics

Voltage: 250 Vac
Current: 16 A
Fréquency: 50 Hz

■ 5.4 Climatic characteristics

Storage and operating temperature: - 5° C to + 40° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents: Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleached 10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. ACCESSORIES

Cat. No. 0 508 99: Label
Cat. No. 0 502 99: Tamperproof cover for sockets (cat. no. 0 861 55)

8. STANDARDS AND APPROVALS

Conforming to standard NFC 15-100 (child safety provided by clip-on cover system on all sockets).

Compliant with installation and manufacturing standards.
See e.catalogue