



Céliane™

6 A push-buttons

Cat. Nos: 0 670 31/34/38



0 670 31/34



0 670 38


1. USE

General lighting control mechanisms with or without indicating components.

2. RANGE

Description	Cat. No.
2-way push-button - NO-NC contact 1-gang	0 670 31
Pushbutton - NO contact 2 volt-free terminals for illuminated function 1-gang	0 670 34
Pull-cord push-button 1-gang	0 670 38

3. DIMENSIONS (mm)

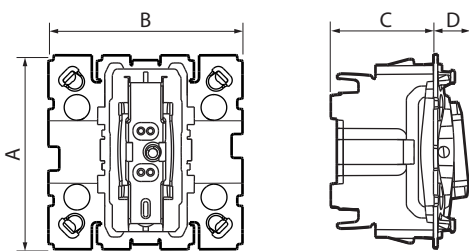


Cat. Nos	A	B	C	D
0 670 31/34	45	45	24	8
0 670 38	45	45	22.5	17.5


4. CONNECTION

Terminal type: automatic
 Terminal capacity: 2 x 2.5 mm²
 Strip wires to 12 mm


Cat. No. 0 670 31

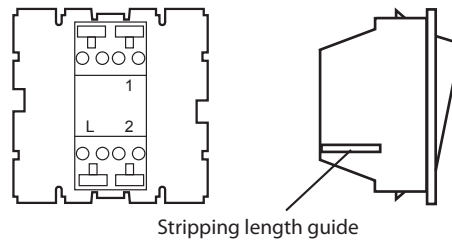

Cat. No. 0 670 34

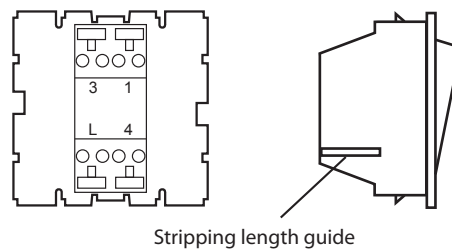

Cat. No. 0 670 38

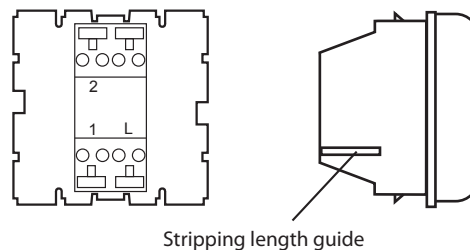


5. WIRING

■ **5.1 Locator function:** ensures the switch is visible in the dark.

Cat. No: 0 670 31

Insert lamp Cat. No. 0 676 86 or lamp Cat. No. 0 676 87.

Use a special cover plate Cat. No. 0 680 03 or 0 683 03 or 0 679 03

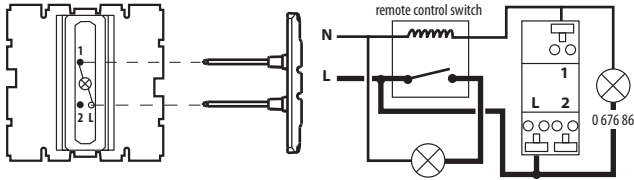


■ **5.2 Indicator function (state of a circuit)**

Cat. No: 0 670 34


Insert lamp Cat. No. 0 676 88 (230 Vac).

Use a special cover plate Cat. No. 0 680 03 or 0 683 03 or 0 679 03

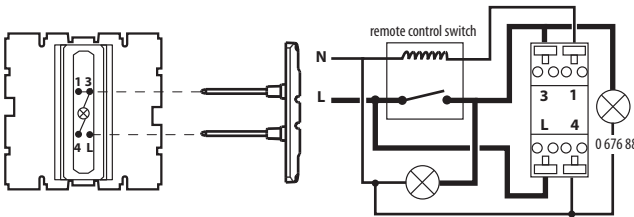


■ **5.3 Locator function or indicator function with opalescent ring**
Separate lamp

Cat. No. 0 676 70 (230 Vac)

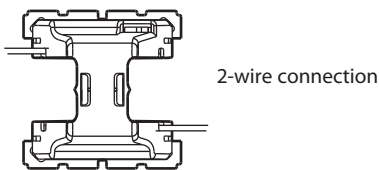

2-wire connection

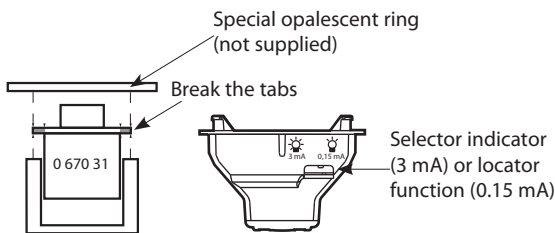

Cat. No. 0 676 70 (230 Vac)

6. TECHNICAL CHARACTERISTICS

■ **6.1 Mechanical characteristics**

Impact tests: IK 04

Penetration by solid bodies and liquids: IP 21 D

■ **6.2 Material characteristics**

- Mechanism: PC

- Colour: grey

- Halogen-free

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place

+ 650° C / 30 s for other parts made of insulating materials

■ **6.3 Electrical characteristics**

Voltage: 250 V~

Current: 6 A

■ **6.4 Climatic characteristics**

Storage temperature: - 10° C to + 60° C

Operating temperature: - 5° C to + 35° C

7. ACCESSORIES

Bulbs for switches with indicator:

Locator	Indicator	Locator/Indicator
0 676 86 (230 V/0.15 mA)	0 676 88 distributed phase (230 V/3 mA)	0 676 70 (230 V)
0 676 87 (12/24/48 V)		

Cord for pull-cord 2-way switch

0 670 38	0 898 05 cord 1.5 m
----------	---------------------

8. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e-catalogue.