


Belanko™ Shaver socket

Cat. No(s): 6 170 68 - 6 172 68 - 6 173 68 - 6 174 68

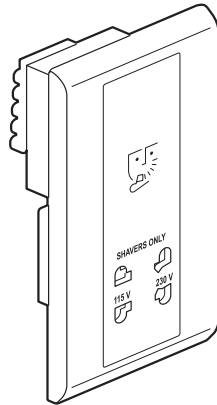


1. USE

Shaver socket for different international standards: European, US, British, Australian and Chinese.
 Supplied with 2 screws M3.5 for BS boxes.
 Surface or flush-mounting, back box to be min. 47 mm deep.

2. RANGE

Description	White	Ivory	Dark Grey	Brown
Shaver socket with earth connector 2 gang	6 170 68	6 172 68	6 173 68	6 174 68

3. DIMENSIONS (mm)

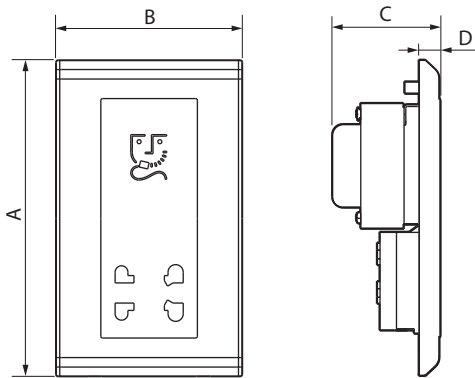

A	B	C	D
146	86	50	10

4. CONNECTION

Type of terminals: with screws
 Terminal capacity: 2 x 1.5 mm²
 Stripping length: 12 mm
 Screwdriver: 4 mm flat blade

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04
 Protection against solid bodies / liquids: IP 40

■ 5.2 Material characteristics

Thermoplastic with glossy finish (White - Ivory)
 Colour: White: T084 PC
 Ivory: PC
 Dark Grey: PC painted
 Brown/ PC painted

Halogen free
 UV resistant

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.
 + 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Protection against overload and short circuits by thermal relay limiting the power available at 20 VA.
 Transformer: primary 230 V~
 Secondary 115/230 V~
 Frequency: 50/60 Hz
 Power: 20 VA max.

■ 5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 35° C

6. CLEANING

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: An initial test is required for the use of other special maintenance products.

7. STANDARDS AND APPROVALS

Conform to BS 61558