

1. USAGE

Permet la commande de l'extinction générale ON/OFF et de l'ouverture/fermeture d'un ouvrant.

Allows control of all connected wired controls (lights, appliances, roller shutters).


Requires the prior installation of a starter pack for connected installation or a Control modul.

With keychain hook.

2. RANGE

Description	Graphite
Connected poket remote control, 4 configurable scenarios. Supplied with battery. With LED indicator (configuration) and RESET button (hidden) used to return to factory settings.	0 676 95

3. DIMENSIONS (mm)

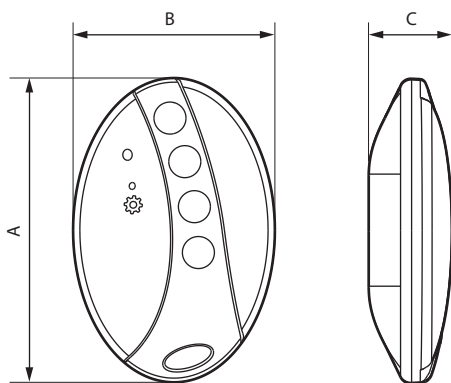


A	B	C
76	50,5	21

4. FONCTIONNEMENT

LED indicators:

- useful during installation
- when pressed, burst flash red if the battery power is low

RESET button used to return to factory mode

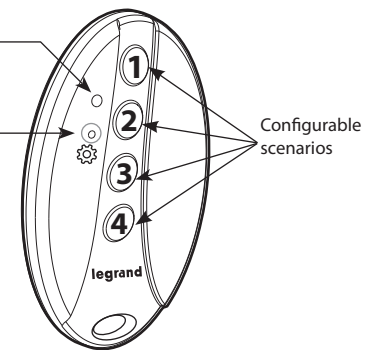

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against impacts: IK 02
 Protection against solid bodies/liquids: IP 40

■ 5.2 Material characteristics

Housing and front cover: ABS
 Halogen-free
 UV resistant

■ 5.3 Electrical characteristics

Powered by a CR2032 - 3 V lithium battery (supplied)
 Battery life: 8 years for 10 activations a day
 Frequency band: 2.4 to 2.44835 GHz
 Power level: < 100 mW

■ 5.4 Climate characteristics

Usage temperature: + 5°C to + 45°C
 Storage temperature: 0°C to + 45°C

6. CARE

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using special cleaning products.



Take care to recycle the battery appropriately

7. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (0 676 95) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrandoc.com