


Mosaic[™] TV/SAT sockets

Cat. No: 0 787 95




1. USE


TV/SAT: For receiving TV and satellite signals UHD (ultra high definition) compatible Class A shielding - Star wiring Recommended cable 17/19 VATC Single cable entry

2. RANGE

Cat. No.	Item	No. of modules	
0 787 95	TV/SAT socket	1	


3. DIMENSIONS (mm)






Cat. No.	Α	В	С	D
0 787 95	45	22.5	28	12

4. CONNECTION

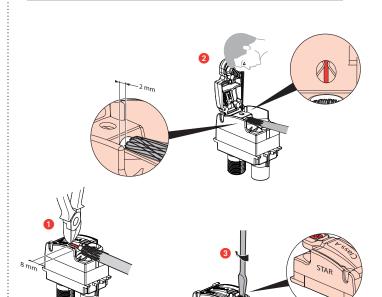

Cat. No: 0 787 95

5. WIRING PRECAUTIONS





Connection from the rear of the socket reduces deformation of the coaxial cable, thus avoiding the risk of impedance loss and impaired performance.

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 21 Protection against impact: IK 04 Cable strength 120 N: IEC 61169-24

■ 6.2 Material characteristics

Material: - Cover plate: ABS

- Zero halogen
- UV resistant

Motor: - Casing: Zamac

- Cover: Zamac
- Pin: Bronze
- Screws: Zinc-plated steel

■ 6.3 Electrical characteristics

- Male connector Ø 9.52 mm (TV)
- Female F screw-type connector (SAT)
- Characteristic impedance: 75 ohm

Class A shielding efficiency (class A shielding is necessary to prevent interference from 3G and 4G phone signals, as these undesirable signals can cause pixellation of on-screen images or distort soundtracks)

- Frequency bands:

TV: 5-68/120-862 MHz

SAT: 950-2400 MHz

- Insulation resistance: IEC 61169-24

■ 6.4 Climate characteristics

Storage and operating temperature: -5 °C to +35 °C

7. CLEANING

Clean the surface with a cloth.


Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using special cleaning products.

8. STANDARDS AND APPROVALS

- EN 50083-2
- Class A certificate

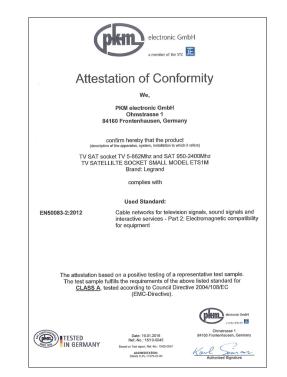

9. PERFORMANCE

