


RCCBs - DX³-ID

residual current circuit breakers 16 A to 100 A - AC, A, F and B types

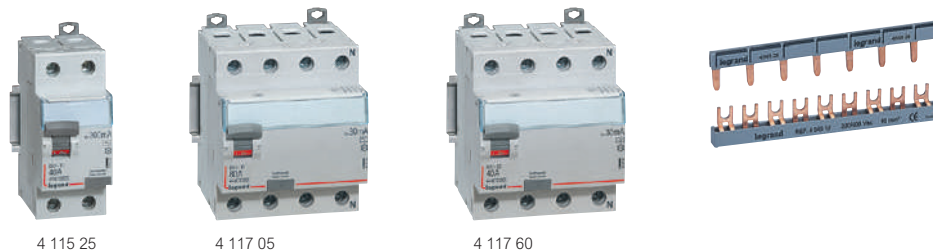

Technical characteristics **see e-catalogue**

- Conform to IEC 61008 - 1, IEC 62423 (B type and F type)
- Compatible with prong-type and fork type supply busbars
 - AC type : detect sinusoidal AC residual currents
 - A type : detect sinusoidal AC and pulsating DC residual currents
 - F type (High immunity) : detect AC and pulsating DC residual currents
- Enhanced immunity to unwanted tripping in disturbed environments
 Detection of high frequency fault currents
- B type : detect sinusoidal AC, pulsating DC and smooth DC residual currents
- Can be equipped with DX³ signalling and remote tripping auxiliaries and motorised controls (p. 72)

Pack	Cat.Nos	2-pole 230 V~		
		AC type		
		Sensitivity (mA)	Nominal Rating In (A)	Number of modules
1	4 115 00	10	16	2
1	4 115 04	30	25	2
1	4 115 05	30	40	2
1	4 115 06	30	63	2
1	4 115 07	30	80	2
1	4 115 08	30	100	2
1	4 115 14	100	25	2
1	4 115 15	100	40	2
1	4 115 16	100	63	2
1	4 115 17	100	80	2
1	4 115 24	300	25	2
1	4 115 25	300	40	2
1	4 115 26	300	63	2
1	4 115 27	300	80	2
1	4 115 28	300	100	2
1	4 115 37	100 selective	100	2
1	4 115 43	300 selective	63	2
		A type		
1	4 115 50	10	16	2
1	4 115 54	30	25	2
1	4 115 55	30	40	2
1	4 115 56	30	63	2
1	4 115 57	30	80	2
1	4 115 69	300	25	2
1	4 115 70	300	40	2
1	4 115 71	300	63	2
1	4 115 72	300	80	2
		F type (old Hpi type)		
1	4 115 90	30	25	2
1	4 115 91	30	40	2
1	4 115 92	30	63	2
		B type		
		Can be equipped with dedicated auxiliary contact Cat. No 4 062 59 (p. 72)		
1	4 118 42	30	40	4
1	4 118 43	30	63	4
1	4 118 44	300	40	4
1	4 118 45	300	63	4

Auxiliaries, accessories and remote control **p. 72**



Pack	Cat.Nos	4-pole - 400 V~ - neutral on right-hand side			
		AC type			
		Vis/vis	Sensitivity (mA)	In (A)	Number of modules
1	4 117 02		30	25	4
1	4 117 03		30	40	4
1	4 117 04		30	63	4
1	4 117 05		30	80	4
1	4 117 12		100	25	4
1	4 117 13		100	40	4
1	4 117 14		100	63	4
1	4 117 15		100	80	4
1	4 117 22		300	25	4
1	4 117 23		300	40	4
1	4 117 24		300	63	4
1	4 117 25		300	80	4
1	4 117 45	300 selective	40	4	4
1	4 117 46	300 selective	63	4	4
1	4 117 32	500	25	4	4
1	4 117 33	500	40	4	4
1	4 117 34	500	63	4	4
1	4 117 35	500	80	4	4
		A type			
1	4 117 59	30	25	4	4
1	4 117 60	30	40	4	4
1	4 117 61	30	63	4	4
1	4 117 62	30	80	4	4
1	4 117 63	30	100	4	4
1	4 117 69	100	25	4	4
1	4 117 70	100	40	4	4
1	4 117 71	100	63	4	4
1	4 117 72	100	80	4	4
1	4 117 73	100	100	4	4
1	4 117 79	300	25	4	4
1	4 117 80	300	40	4	4
1	4 117 81	300	63	4	4
1	4 117 82	300	80	4	4
1	4 117 83	300	100	4	4
1	4 118 00	300 selective	40	4	4
1	4 118 01	300 selective	63	4	4
1	4 117 89	500	25	4	4
1	4 117 90	500	40	4	4
1	4 117 91	500	63	4	4
1	4 117 92	500	80	4	4
1	4 117 93	500	100	4	4
		4-pole - 400 V~ - neutral on left-hand side			
		B type			
		Can be equipped with dedicated auxiliary contact Cat. No 4 062 59 (p. 72)			
1	4 118 46	30	40	4	4
1	4 118 47	30	63	4	4
1	4 118 48	300	40	4	4
1	4 118 49	300	63	4	4