


RCBOs DX³ 10000 - black neutral lead

residual circuit breakers from 6 to 40 A - A type

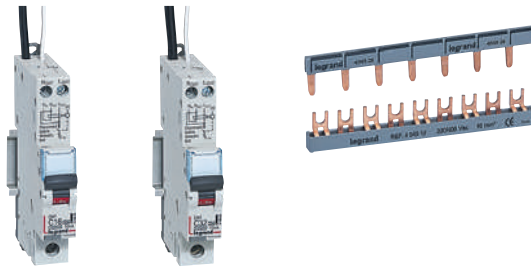

4 189 26

4 189 29


Conform to IEC 61009-1 and BS/NZS 61009-1
Compatible with both prong-type and fork type supply busbars
Voltage dependent tripping

Breaking capacity:
10000 - IEC 61009-1

- A type : detect AC and DC component faults
- Solid neutral (not switched)
- Functional earth (FE) cable ensuring RCD protection in case of neutral interruption
- Downstream connection top side
- Can be equipped with DX³ signalling and remote tripping auxiliaries and motorised controls (p. 72)

RCBOs DX³ 10000 - blue neutral lead

residual circuit breakers from 6 to 45 A - A type

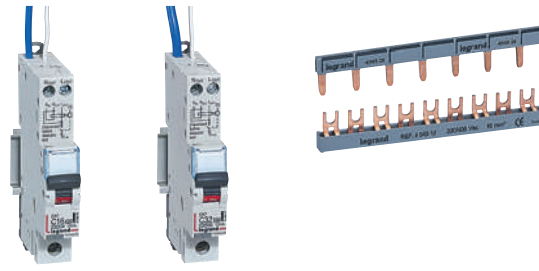

4 189 74

4 189 77

Conform to IEC 61009-1 and BS/EN 61009-1
Compatible with both prong-type and fork type supply busbars
Voltage dependent tripping

Breaking capacity:
10000 - IEC 61009-1

- A type : detect AC and DC component faults
- Solid neutral (not switched)
- Functional earth (FE) cable ensuring RCD protection in case of neutral interruption
- Downstream connection top side
- Can be equipped with DX³ signalling and remote tripping auxiliaries and motorised controls (p. 72)

Pack	Cat.Nos	Single pole - 230 V~		Number of modules
	N	A Type 10 mA	Nominal rating In (A)	
1	4 189 24	C curve	6	1
1	4 189 25		10	1
1	4 189 26		16	1
1	4 189 27		20	1
1	4 189 28		25	1
1	4 189 29		32	1
1	4 189 30		40	1
		A Type 30 mA		
1	4 189 32		6	1
1	4 189 33		10	1
1	4 189 34		16	1
1	4 189 35		20	1
1	4 189 36		25	1
1	4 189 37		32	1
1	4 189 38		40	1
		A Type 100 mA		
1	4 189 40		6	1
1	4 189 41		10	1
1	4 189 42		16	1
1	4 189 43		20	1
1	4 189 44		25	1
1	4 189 45		32	1
1	4 189 46		40	1

Pack	Cat.Nos	Single pole - 230 V~		Number of modules
	N	A Type 10 mA	Nominal rating In (A)	
1	4 189 72	C curve	6	1
1	4 189 73		10	1
1	4 189 74		16	1
1	4 189 75		20	1
1	4 189 76		25	1
1	4 189 77		32	1
1	4 189 78		40	1
1	4 189 79		45	1
		A Type 30 mA		
1	4 189 56	B curve	6	1
1	4 189 57	C curve	10	1
1	4 189 58		16	1
1	4 189 59		20	1
1	4 189 60		25	1
1	4 189 61		32	1
1	4 189 62		40	1
1	4 189 63		45	1
		A Type 100 mA		
1	4 189 88	C curve	6	1
1	4 189 89		10	1
1	4 189 90		16	1
1	4 189 91		20	1
1	4 189 92		25	1
1	4 189 93		32	1
1	4 189 94		40	1
1	4 189 95		45	1