


MCBs DX³ 10000 - 16 kA

thermal magnetic MCBs from 2 A to 125 A - D curve

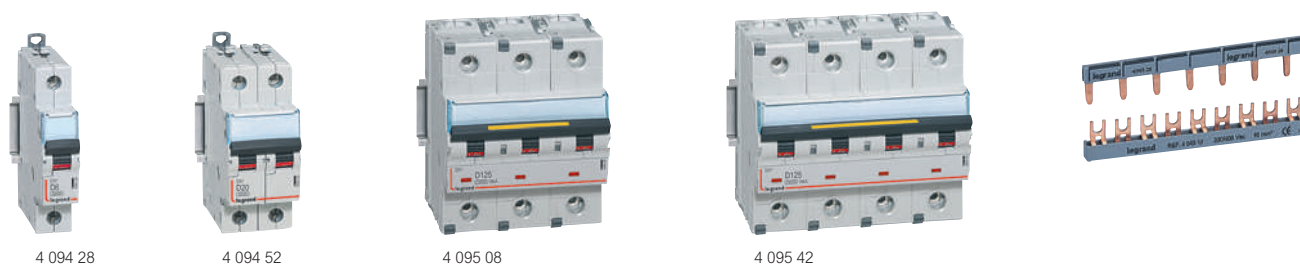

Technical characteristics **see e-catalogue**

Conform to IEC 60898-1

Compatible with both prong-type and fork type supply busbars (except 80 A, 100 A and 125 A MCBs)

Breaking capacity:

10000 - IEC 60898-1 - 400 V~

16 kA - IEC 60947-2 - 400 V~

Can be equipped with DX³ signalling and remote tripping auxiliaries, motorised controls (p. 72) and add-on modules (p. 70)

Pack	Cat.Nos	Single pole 230/400 V~		Pack	Cat.Nos	3-pole 400 V~	
	D curve	Nominal rating I _n (A)	Number of modules		D curve	Nominal rating I _n (A)	Number of modules
1	4 094 25	2	1	1	4 094 92	2	3
1	4 094 28	6	1	1	4 094 95	6	3
1	4 094 30	10	1	1	4 094 97	10	3
1	4 094 32	16	1	1	4 094 99	16	3
1	4 094 33	20	1	1	4 095 00	20	3
1	4 094 34	25	1	1	4 095 01	25	3
1	4 094 35	32	1	1	4 095 02	32	3
1	4 094 36	40	1	1	4 095 03	40	3
1	4 094 37	50	1	1	4 095 04	50	3
1	4 094 38	63	1	1	4 095 05	63	3
				1	4 095 06	80	4.5
				1	4 095 07	100	4.5
				1	4 095 08	125	4.5
	D curve	Nominal rating I _n (A)	Number of modules		D curve	Nominal rating I _n (A)	Number of modules
1	4 094 44	2	2	1	4 095 26	2	4
1	4 094 47	6	2	1	4 095 29	6	4
1	4 094 49	10	2	1	4 095 31	10	4
1	4 094 51	16	2	1	4 095 33	16	4
1	4 094 52	20	2	1	4 095 34	20	4
1	4 094 53	25	2	1	4 095 35	25	4
1	4 094 54	32	2	1	4 095 36	32	4
1	4 094 55	40	2	1	4 095 37	40	4
1	4 094 56	50	2	1	4 095 38	50	4
1	4 094 57	63	2	1	4 095 39	63	4
1	4 094 58	80	3	1	4 095 40	80	6
1	4 094 59	100	3	1	4 095 41	100	6
1	4 094 60	125	3	1	4 095 42	125	6