



Legrand cabling system LCS³ Enclosures - cabling openrack and accessories

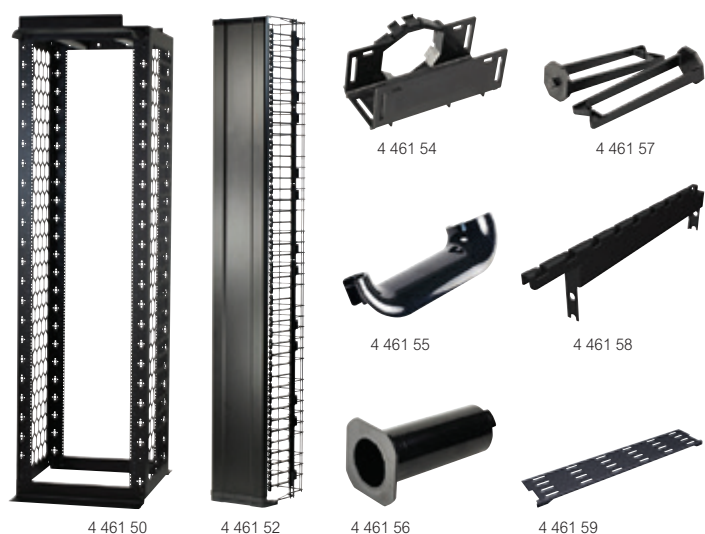

Pack	Cat.Nos	Cabling openrack and accessories
1	4 461 50	Punched hole channel rack, 7ft x 24", black, 3/8" square hole
1	4 461 52	Cable duct with door
1	4 461 54	Hexagonal cable throughs (set of 6)
1	4 461 55	Bend limiting clips (set of 12)
1	4 461 56	Cable management spools (set of 4)
1	4 461 57	Cable management rings
1	4 461 58	Cable duct mounting brackets (top of rack Cablofil)
1	4 461 60	Overhead Cable Pathway, 5 U, 19"
1	4 461 59	Horizontal cable manager
1	0 465 70	19" cable manager with cover - 1 U
1	0 465 71	19" cable manager with cover - 2 U
1	0 464 23	Screws

Legrand cabling system LCS³ Enclosures - wall mounting enclosures

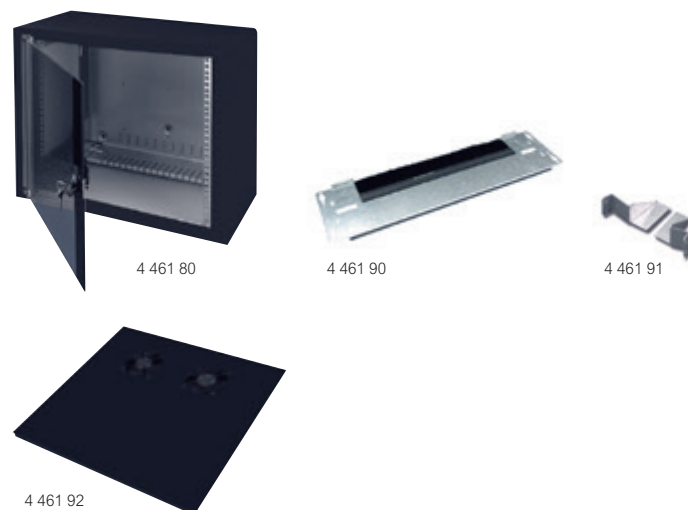

Pack	Cat.Nos	Wall-mounting enclosures with glass door																												
		<p>Consist of:</p> <ul style="list-style-type: none"> - a wall element with an integrated strain relief profile - 4 bars running front to back - 2 cable entry plates (top and bottom) - a set of two 19" profiles with adjustable depth (in steps of 50 mm) and a pattern of holes on the side allowing accessories to be fitted. The casing consists of two identical upper and lower panels with ventilation slots at the rear, two identical side panels and a Securit glass door with an EK-333 cylinder lock with a handle. Possibility to adjust the cable holes' size on the spot thanks to the handy bend-away fingers <p>Width: 600 mm Colour: RAL 9011 Finishing: powder coating Max. load: 100 kg</p> <p>Supplied with 1 rear plate, 4 depthwise bars, 2 cable entry plates, 2 19" profiles, 2 roof and floor plates, 2 side panels, 1 glass door, 1 assembly set, including assembly guide</p> <table border="1"> <thead> <tr> <th>Capacity</th> <th>Width (mm)</th> <th>Depth (mm)</th> <th>Height (mm)</th> </tr> </thead> <tbody> <tr> <td>6 U</td> <td>600</td> <td>525</td> <td>342</td> </tr> <tr> <td>9 U</td> <td>600</td> <td>525</td> <td>476</td> </tr> <tr> <td>9 U</td> <td>600</td> <td>625</td> <td>476</td> </tr> <tr> <td>12 U</td> <td>600</td> <td>625</td> <td>609</td> </tr> <tr> <td>15 U</td> <td>600</td> <td>625</td> <td>742</td> </tr> <tr> <td>21 U</td> <td>600</td> <td>625</td> <td>1009</td> </tr> </tbody> </table>	Capacity	Width (mm)	Depth (mm)	Height (mm)	6 U	600	525	342	9 U	600	525	476	9 U	600	625	476	12 U	600	625	609	15 U	600	625	742	21 U	600	625	1009
Capacity	Width (mm)	Depth (mm)	Height (mm)																											
6 U	600	525	342																											
9 U	600	525	476																											
9 U	600	625	476																											
12 U	600	625	609																											
15 U	600	625	742																											
21 U	600	625	1009																											
1	4 461 80																													
1	4 461 81																													
1	4 461 82																													
1	4 461 84																													
1	4 461 86																													
1	4 461 87																													

Pack	Cat.Nos	Accessories
1	4 461 90	<p>Cable entry strip for wall enclosure For dust-free cable entry. To be used in replacement of a top and/or bottom cable entry plate Supplied with 1 (360 mm) cable entry brush, including fastenings</p>
1	4 461 91	<p>Corner guide set Comprises 2 corner guide supports (left and right) and fastening materials To be fitted specifically to the sides of the 19" profiles Supports heavy 19" equipment Suitable for wall enclosure Material: sheet steel Colour: Sendzimir</p>
1	4 461 92	<p>Roof plate with integrated fan unit Can be added as an option to generate a forced flow of cooling air through the wall enclosure Comes in replacement of an existing roof panel Can be associated with thermostat Cat.No 4 460 98 Supplied with assembly materials</p>
1	4 461 93	<p>Depth: 525 mm Depth: 625 mm</p>