


Legrand cabling system LCS³ Energy Distribution

single phase Zero-U Power Distribution Units

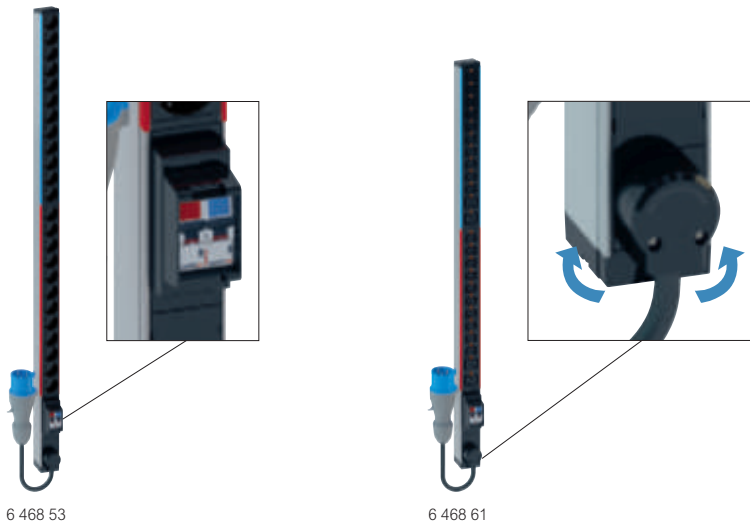

To provide ~ electric power for IT equipment in 19" enclosures
 Single phase Zero-U PDUs for vertical mounting in the cabinet
 230 V - 50/60 Hz power supply
 PDUs with 2 circuits protected by 16 A uni + neutral MCB in a support with projecting edges to avoid accidental breakdown. Each circuit is identified by color coding. The total number of outlets is distributed equally between the 2 circuits. 2P+E outlets: C13 and C19 standard outlets, French/German/British standards outlets equipped with blanks, French/German standards outlets inclined at 55°
 330° rotating cable input for a perfect orientation of the cable and no interference in the cabinet
 C13 and C19 standard outlets are equipped with cord locking system to avoid any accidental disconnection. Universal solution compatible with all the cords (C14 plugs for C13 and C20 plugs for C19)
 Delivered with 2 sets of metallic mounting brackets: button brackets (for quick fixing and variable pitch) and standard brackets (for screw fixing)
 Black modules (outlets and functions)
 Aluminium profile

Pack	Cat.Nos	Standard	Pack	Cat.Nos	With ammeter
1	6 468 52	German standard 24 outlets Connection on terminal block up to 6 mm ²		6 468 65	Measure consumption to provide better installation management: balancing circuits, displaying available capacity, preventing overloads and power failures 1 ammeter per circuit Rotating display to ensure a perfect reading whatever the PDU mounting direction is (horizontal, vertical with top or bottom power supply input) IEC 60320 standard 20 C13 outlets + 4 C19 outlets with cord locking system. Connection on terminal block up to 6 mm ²
1	6 468 53	British standard 24 outlets 3 m power supply cord with IEC 60309 32 A 2P+E plug			
1	6 468 54	French standard 24 outlets Connection on terminal block up to 6 mm ²			
1	6 468 50	Italian standard 24 outlets 3 m power supply cord with IEC 60309 32 A 2P+E plug			
1	6 468 51	IEC 60320 standard 24 C13 outlets with cord locking system Connection on terminal block up to 6 mm ²			
1	6 468 59	24 outlets 3 m power supply cord with IEC 60309 32 A 2P+E plug			
1	6 468 56	24 C13 outlets with cord locking system 3 m power supply cord with IEC 60309 32 A 2P+E plug			
1	6 468 57	20 C13 outlets + 4 C19 outlets with cord locking system. Connection on terminal block up to 6 mm ²			
1	6 468 60	20 C13 outlets + 4 C19 outlets with cord locking system. 3 m power supply cord with IEC 60309 32 A 2P+E plug			
1	6 468 61	20 C13 outlets + 4 C19 outlets with cord locking system. 3 m power supply cord with IEC 60309 32 A 2P+E plug			