



Arteor™ 10 AX switches


Cat. No(s): 5 700 04/05/34/35/62/63/64/65/66/67 - 5 710 04/05/34/35/62/63/64/65/66/67
 5 720 04/05/34/35 - 5 725 04/05/34/35 - 5 730 10/11/12/13/14/15/60/61
 5 731 10/11/12/13/14/15/60/61



5 700 04 - 5 710 04 - 5 720 04 - 5 725 04



5 700 34 - 5 710 34 - 5 720 34 - 5 725 34















5 700 66 - 5 710 66 - 5 730 60 - 5 731 61

1. USE


General lighting control mechanisms.

2. RANGE


	Designation	Finishes				No. of modules	Connection method	Characteristics
		White	Magnesium	Soft Alu	Champagne			
	One-way switch (square)	572 004	572 504	5 710 04	5 700 04	1	with screws	10 AX - 250 VAC
	Two-way switch (square)	572 005	572 505	5 710 05	5 700 05	1	with screws	10 AX - 250 VAC
	One-way switch (square)	572 034	572 534	5 710 34	5 700 34	2	with screws	10 AX - 250 VAC
	Two-way switch (square)	572 035	572 535	5 710 35	5 700 35	2	with screws	10 AX - 250 VAC
	One-way switch (round left)	573 010	573 110	5 710 62	5 700 62	1	with screws	10 AX - 250 VAC
	One-way switch (middle)	573 011	573 111	-	-	1	with screws	10 AX - 250 VAC
	One-way switch (round right)	573 012	573 112	5 710 63	5 700 63	1	with screws	10 AX - 250 VAC
	Two-way switch (round left)	573 013	573 113	5 710 64	5 700 64	1	with screws	10 AX - 250 VAC
	Two-way switch (middle)	573 014	573 114	-	-	1	with screws	10 AX - 250 VAC
	Two-way switch (round right)	573 015	573 115	5 710 65	5 700 65	1	with screws	10 AX - 250 VAC
	One-way switch (round)	573 060	573 160	5 710 66	5 700 66	2	with screws	10 AX - 250 VAC
	Two-way switch (round)	573 061	573 161	5 710 67	5 700 67	2	with screws	10 AX - 250 VAC

3. PREPARATION

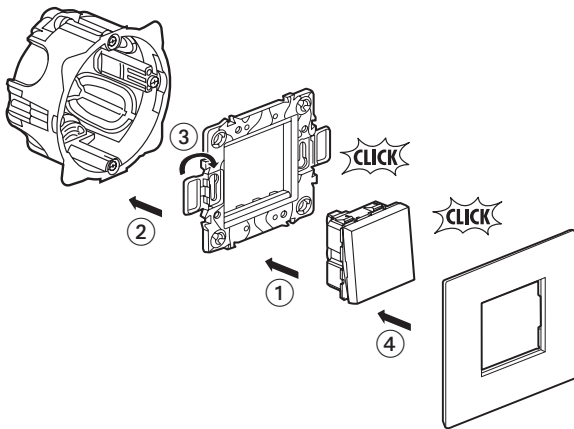The mechanisms can be flush-mounted or surface-mounted.




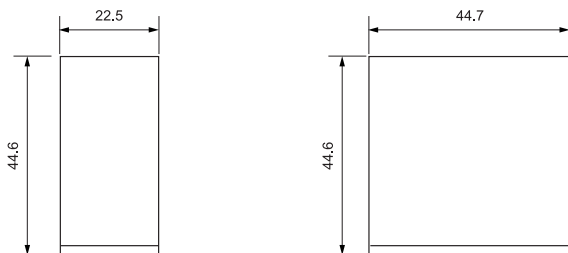4. OVERALL DIMENSIONS



5 700 04/05/62/63/64/65
5 710 04/05/62/63/64/65
5 720 04/05
5 725 04/05
5 730 10/11/12/13/14/15
5 731 10/11/12/13/14/15

5 700 34/35/66/67
5 710 34/35/66/67
5 720 34/35 - 5 725 34/35
5 730 60/61 - 5 731 60/61



5. PREPARATION

Terminals: with screws
Capacity: 2 x 2.5 mm² or 1 x 4 mm²
Stripping: 10 mm
Screwdriver: 4 mm flat-blade up to 5.5 mm

6. OPERATION

Push button mechanism.

7. TECHNICAL CHARACTERISTICS

7.1 Mechanical characteristics

Impact tests: IK 04
Protection by solid bodies/liquids: IP 40 (mounted)
IP 20 (alone)

7.2 Material characteristics

Rocker: Polycarbonate
Base: Polycarbonate
Basket: Polypropylene

7.3 Electrical characteristics

Voltage: 250 VAC
Current: 10 AX
Self-extinguishing: 650° C / 30 s

7.4 Climatic characteristics

Storage temperatures: - 10° C to + 70° C
Operating temperatures: - 5° C to + 50° C

8. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following cleaning agents: Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: Always test before using other special cleaning products.

9. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.
Refer to e-catalogue.