



Arteor™ Switched socket outlets 13 A

Cat. No(s): 5 700 48/49 - 5 710 48/49
 5 721 41/43/44/45/46/47/49 - 5 726 43/44/45/46/47/49



5 721 43

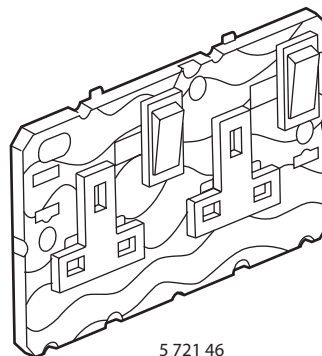

5 721 46

1. USE

British standard single and double pole socket outlets, switched and shuttered.
 Mechanisms supplied with rocker plates, to be equipped with special plates.
 Fixing with screws.

2. RANGE

Single pole socket outlets - 2 P+E switched - 1-gang

5 721 43	White
5 726 43	Magnesium
5 700 48	Champagne
5 710 48	Alu

Single pole socket outlets - 2 P+E switched + neon - 1-gang

5 721 44	White
5 726 44	Magnesium

Single pole socket outlets - 2 P+E switched - 2-gang

5 721 45	White
5 726 45	Magnesium
5 700 49	Champagne
5 710 49	Alu

Single pole socket outlets - 2 P+E switched + neon - 2-gang

5 721 46	White
5 726 46	Magnesium


Double pole socket outlets - 2 P+E switched - 1-gang

5 721 47	White
5 726 47	Magnesium

Double pole socket outlets - 2 P+E switched - 2-gang

5 721 49	White
5 726 49	Magnesium
5 721 41	Red

3. OVERALL DIMENSIONS (mm)

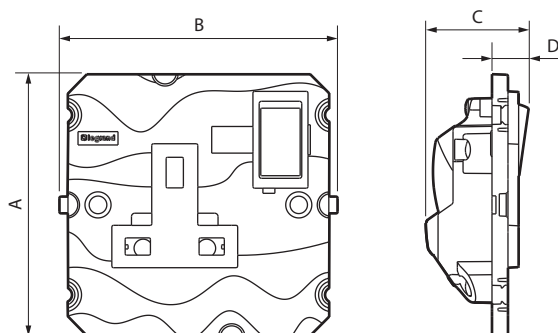

	A	B	C	D
Single-pole	78.5	83.5	31	11
Double-pole	83.5	143.5	31	11

4. CONNECTION

Type of terminals : with screws
 Terminal capacity: 3 x 4 mm²
 Stripping length: 12 mm
 Compatible with flexible or rigid cables.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04
 Penetration by solid bodies/liquids: IP 20

■ 5.2 Material characteristics

Base: PP
 Halogen-free
 Self-extinguishing:
 850°C/30 s for insulating components holding live parts in place.
 650°C/30 s for other insulating components.

■ 5.3 Electrical characteristics

Voltage: 250 V~
 Current: 13 A
 Frequency: 50/60 Hz

■ 5.4 Climate characteristics

Storage temperature: - 10°C to + 70°C
 Usage temperature: - 5°C to + 50°C

6. CARE

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using special cleaning products.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e-catalogue.